


OTL18.5-05-300C

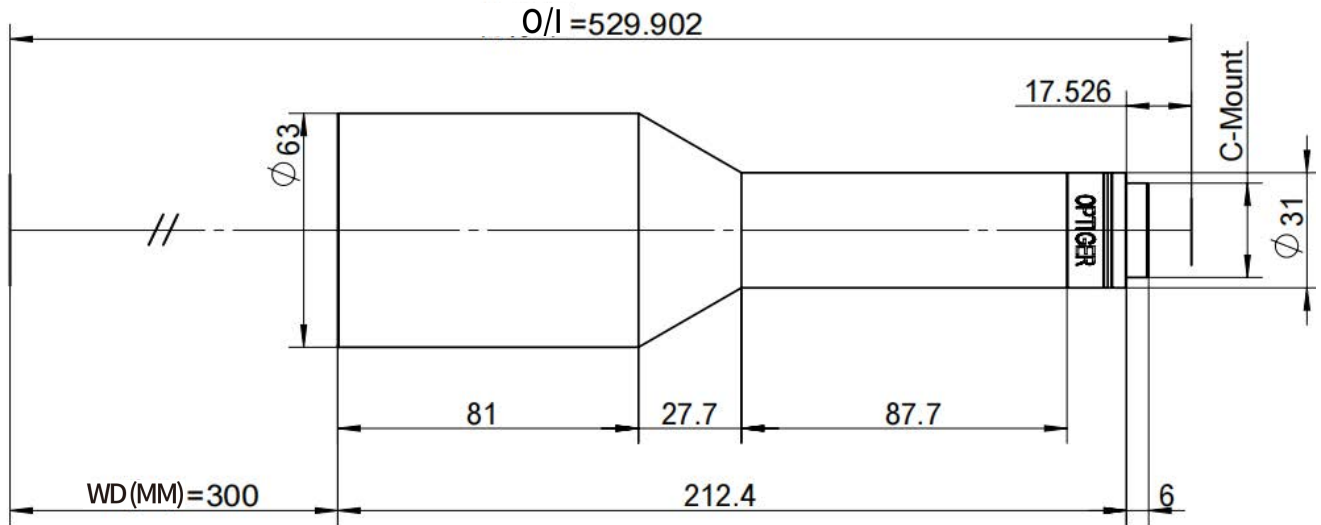

Unit: mm

Specifications

Max. FOV(mm)	37
Sensor Size (mm)	18.5
Magnification	0.5
WD (mm)	300
Effective F-number	13
Object-side Resolution (um)	17.446
DOF (mm)	4.16
Measured Telecentricity	0.025°
Measured Distortion	0.01%
Mount	C-Mount
Length(mm)	212.4
Diameter (mm)	63
Weight (g)	697.0

DESIGNED IN GERMANY
ULTRA HIGH PERFORMANCE TELECENTRIC LENSES

Features


Available for cameras with sensor size of 1.1"

Available for cameras with pixel size of 3.45um

FOV (mm*mm)

1"(12.8X9.6)	25.6X19.2
1.1"(14.1X10.6)	28.2X21.2
Max Sensor Size (14.8X11.1)	29.6X22.2

OTL18.5-05-300C-D

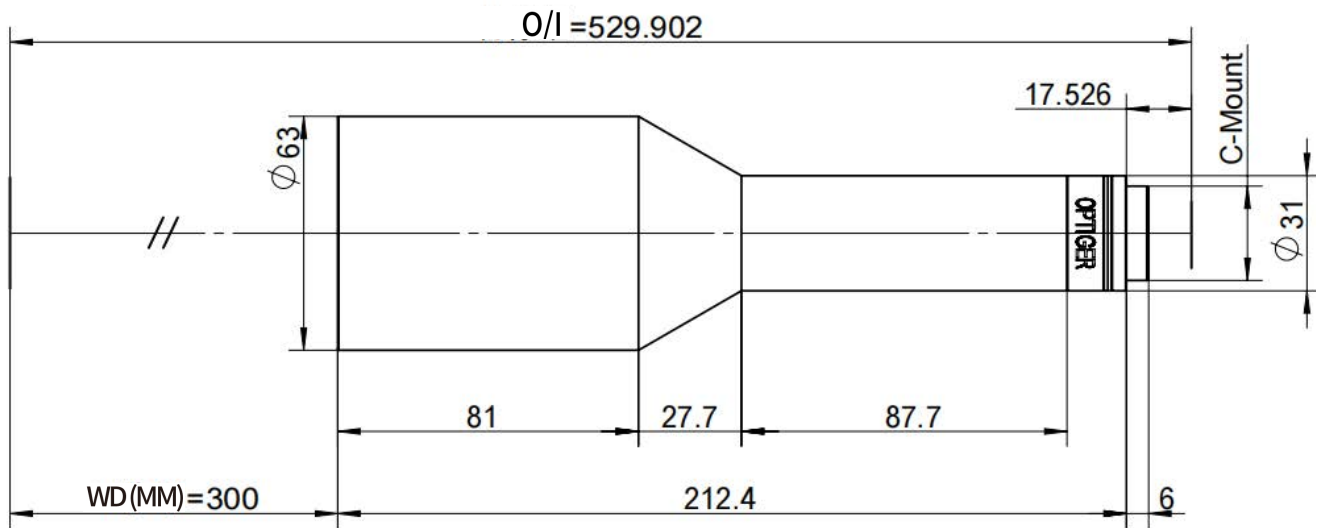

Unit: mm

Specifications

Max. FOV(mm)	37
Sensor Size (mm)	18.5
Magnification	0.5
WD (mm)	300
Effective F-number	20
Object-side Resolution (um)	26.84
DOF (mm)	6.4
Measured Telecentricity	0.03°
Measured Distortion	0.01%
Mount	C-Mount
Length(mm)	212.4
Diameter (mm)	63
Weight (g)	697.0

DESIGNED IN GERMANY
ULTRA HIGH PERFORMANCE TELECENTRIC LENSES

Features

Available for cameras with sensor size of 1.1"

Available for cameras with pixel size of 3.45um

FOV (mm*mm)

1"(12.8X9.6)	25.6X19.2
1.1"(14.1X10.6)	28.2X21.2
Max Sensor Size (14.8X11.1)	29.6X22.2